




CORNELL PUMP COMPANY

CD4MCu

FOR CORROSIVE & ABRASIVE APPLICATIONS



CD4MCu PUMPS
IN STOCK
AND READY
TO SHIP

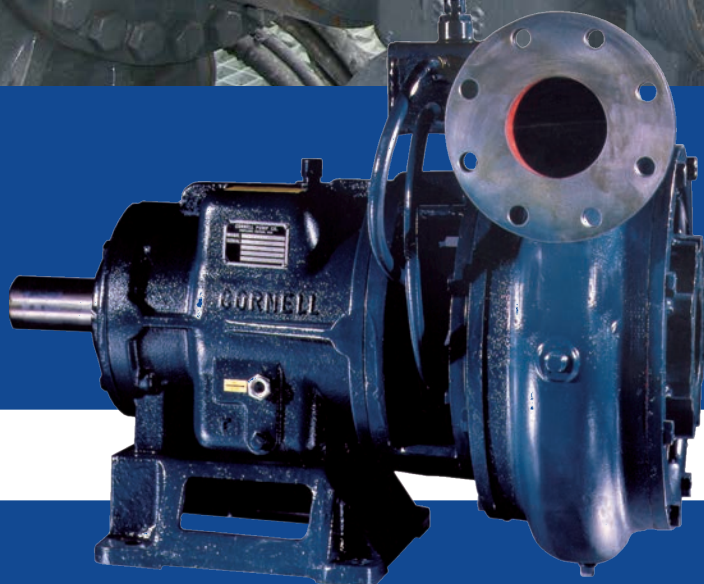

EFFICIENT BY DESIGN





CD4MCu



WHY CD4MCu

CD4MCu is a duplex stainless steel, utilizing a two-phase metallurgy, compared to a single-phase metallurgy, which is used in more common grades of stainless steel, such as 316. This metallurgy process combines the corrosion resistance of 300 series stainless steel with the strength and hardness of 400 series stainless steel.

The end result is a stainless steel with corrosion resistance equal to or better and 316 SS, but with double the yield strength. CD4MCu construction allows the pumps to be used in more abrasive applications with better resistance to corrosive cracking and pitting.

Cornell now stocks CD4MCu castings in stock for 13 of our most popular pump models, allowing us to slash production time. We can have a CD4MCu pump built in as little as one to two weeks.

CD4MCu BENEFITS

- Corrosion and pitting resistance
- Higher strength than standard grades of stainless steel
- Improved ductility and weldability
- Better resistance to embrittlement

CORNELL PUMP BENEFITS

- Fully automated priming and self-priming, dry-run pumps
- Handles air/liquid mixtures with ease
- Patented Cycloseal®, Redi-Prime®, and Run-Dry™ options
- Cornell Competitive Advantage: Patented Engineering Features

FEATURES

- Clean steel
- Brinell hardness up to 285
- Industry-leading two-year warranty


PUMP MODELS AVAILABLE IN STOCK

4414T	8NHTA	6NNT	6NHTB19	2.5H
6NHTA	6NHTB	4622MX	8NHG19	
8NNT	6822MX	4HNTB19	4NNTL	


MOUNTING CONFIGURATIONS

Cornell pumps are available in a variety of mounting configurations, including horizontal and vertical close-coupled pumps, vertical and horizontal frame-mounted pumps, and pumps with an SAE bell housing mounting directly to an engine.


CC
Close-Coupled

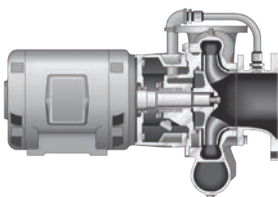


EM
Engine Mount




F
Frame Mount

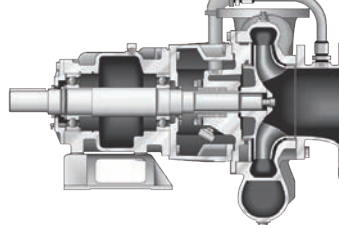


VM/VC/VF
Close Coupled
Coupled
Frame Mount

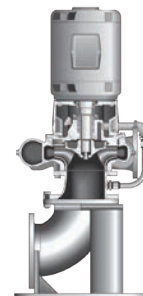

**CORNELL CD4MCu AVAILABLE WITH NEW AGGRESSIVE PRICING
AND SHORT LEAD TIMES THROUGH STOCKED CASTINGS**

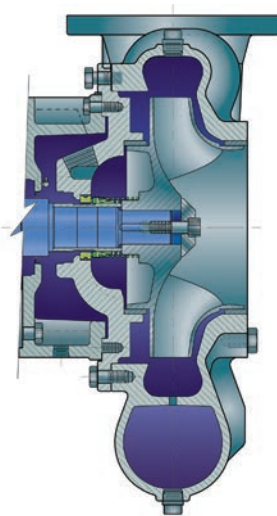

IRRIGATION

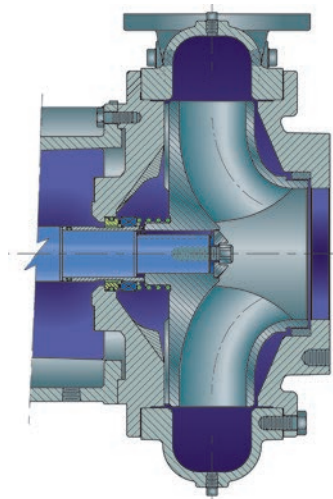

SOLIDS HANDLING

CYCLOSEAL®


Ideally suited for water and waste water applications, Cornell's patented Cycloseal (U.S. Patent # 5,489,187) is a self-contained single mechanical seal with a dished backplate. This configuration requires no external flushing and eliminates the need for a water flush line. The Cycloseal uses stationary deflector vanes cast into the pump backplate in conjunction with contoured impeller back vanes and a dished backplate to create pressure gradients that moves solids and entrained vapor away from the seal faces. The service life of a Cycloseal mechanical seal can be as much as 10 times longer than a typical mechanical seal.

REDI-PRIME®

Cornell Redi-Prime pumps are designed with oversized suctions to provide more flow, reduced friction losses, and higher suction lift. The priming system was designed with the environment in mind. By using a positive sealing float box and a diaphragm vacuum pump, there is no water carry-over to contaminate the environment. With suction lifts of up to 28 feet, heads to 470 feet and flow rates exceeding 20,000 GPM, most Cornell pumps can be readily fitted with the Redi-Prime system.


RUN-DRY™ SYSTEM

For applications where there is the possibility of the pump operating in a dry condition, Cornell's Run-Dry system is the answer. Cornell's Run-Dry system consists of an auxiliary gland and oil reservoir that keeps the seal faces lubricated and prevents dry running of the seal faces during priming, re-priming, or standby operation. The Run-Dry gland is connected to a lubricant reservoir via inlet and outlet lines such that shaft rotation provides continuous circulation and cooling of the lubricant and seal faces. With the Run-Dry system your pump can run dry for hours without damaging the mechanical seal.

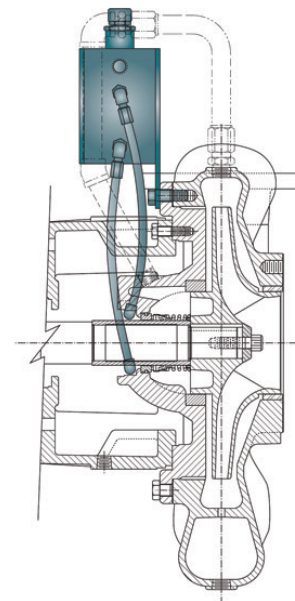

APPLICATIONS


- Food Processing
- Mining
- Industrial Process
- Marine
- Brackish Water
- Deionized Water
- Fertilizer
- Oil/Gas

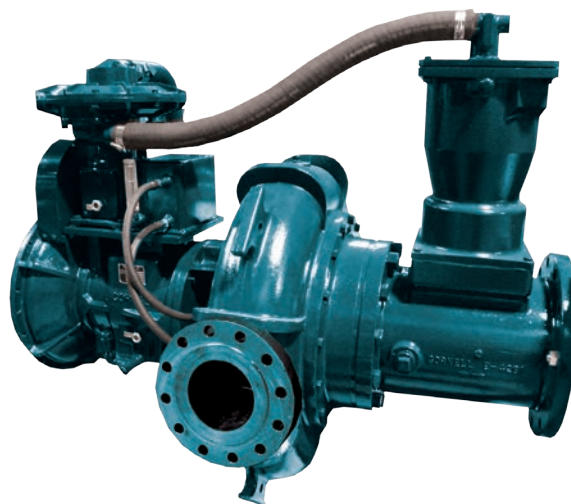

**STRONGER PUMPS, BUILT FASTER, LESS EXPENSIVELY:
THE CORNELL CD4MCu INITIATIVE**



MARKET AND PRODUCT LINE



AGRICULTURAL



FOOD PROCESS



INDUSTRIAL



MINE DEWATERING



MUNICIPAL



REFRIGERATION



OIL & GAS



CHOPPER



CUTTER



EDGE™



HYDRAULIC SUBS



HYDRO TURBINE



IMMERSIBLE



MANURE



MP SERIES



MX SERIES



MX MINING



REDI-PRIME®



STX SERIES



SLURRY



SUBMERSIBLE



WATER TRANSFER

Cyclo Seal® and Redi-Prime® are Registered Trademarks of Cornell Pump Company.

Cornell pumps and products are the subject of one or more of the following U.S. and foreign patents: 3,207,485; 3,282,226; 3,295,456; 3,301,191; 3,630,637; 3,663,117; 3,743,437; 4,335,886; 4,523,900; 5,489,187; 5,591,001; 6,074,554; 6,036,434; 6,079,958; 6,309,169; 2,320,742; 96/8140; 319,837; 918,534; 1,224,969; 2,232,735; 701,979 and are the subject of pending U.S. and foreign patent applications.

CORNELLPUMP.COM
©2015 CORNELL PUMP COMPANY



Cornell Pump Company
Clackamas, Oregon, USA
P: +1 (503) 653-0330
F: +1 (503) 653-0338

AUTHORIZED CORNELL PUMP DISTRIBUTOR



mseinc.net

3801 N. Highway Drive
Tucson, Arizona 85705

520-888-4101

800-666-8320

info@mseinc.net