




 **TSURUMI PUMP®**
BUILT FOR WORK®
CONTRACTOR PUMPS | ENGINE PUMPS | GENERATORS




ELECTRIC SUBMERSIBLE PUMPS - Long Life by Design

LB Features

- 1 TOP DISCHARGE, FLOW THRU DESIGN**
- 2 MULTI-DIRECTIONAL DISCHARGE CONNECTOR:** Can be configured for horizontal or vertical discharge. Providing for a more stable installation.
- 3 RUBBER CASING WITH LARGE ROUNDED CUT-WATERS:** Resists wear and degradation of performance due to abrasive particles.
- 4 CABLE BOOT:** Prevents kinking at cable entrance by extending bending radius.
- 5 ANTI-WICKING BLOCK:** Prevents water incursion due to capillary wicking, should the power cable be damaged or the end submerged.
- 6 DUAL INSIDE MECHANICAL SEAL WITH SILICON CARBIDE FACES:** Provides longer operational life of any seal available.
- 7 OIL LIFTER:** Provides lubrication of the seal faces down to 1/3 of normal oil level and extends seal life by ten times—uses no additional power.

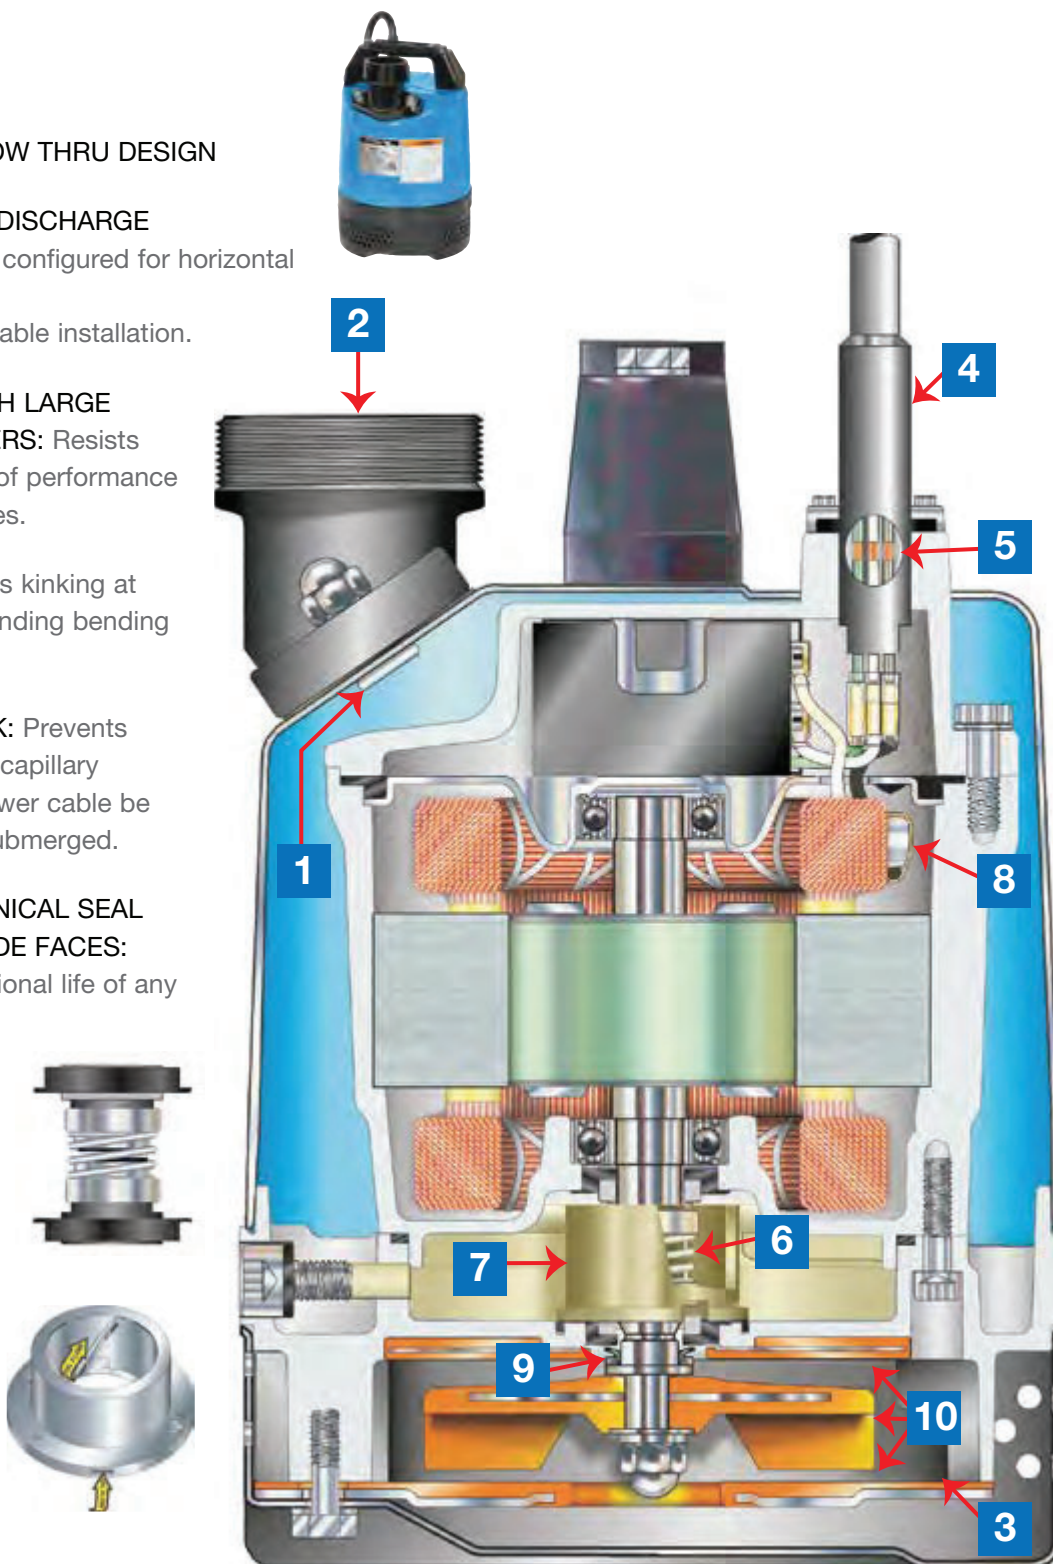

Featured Model LB-480

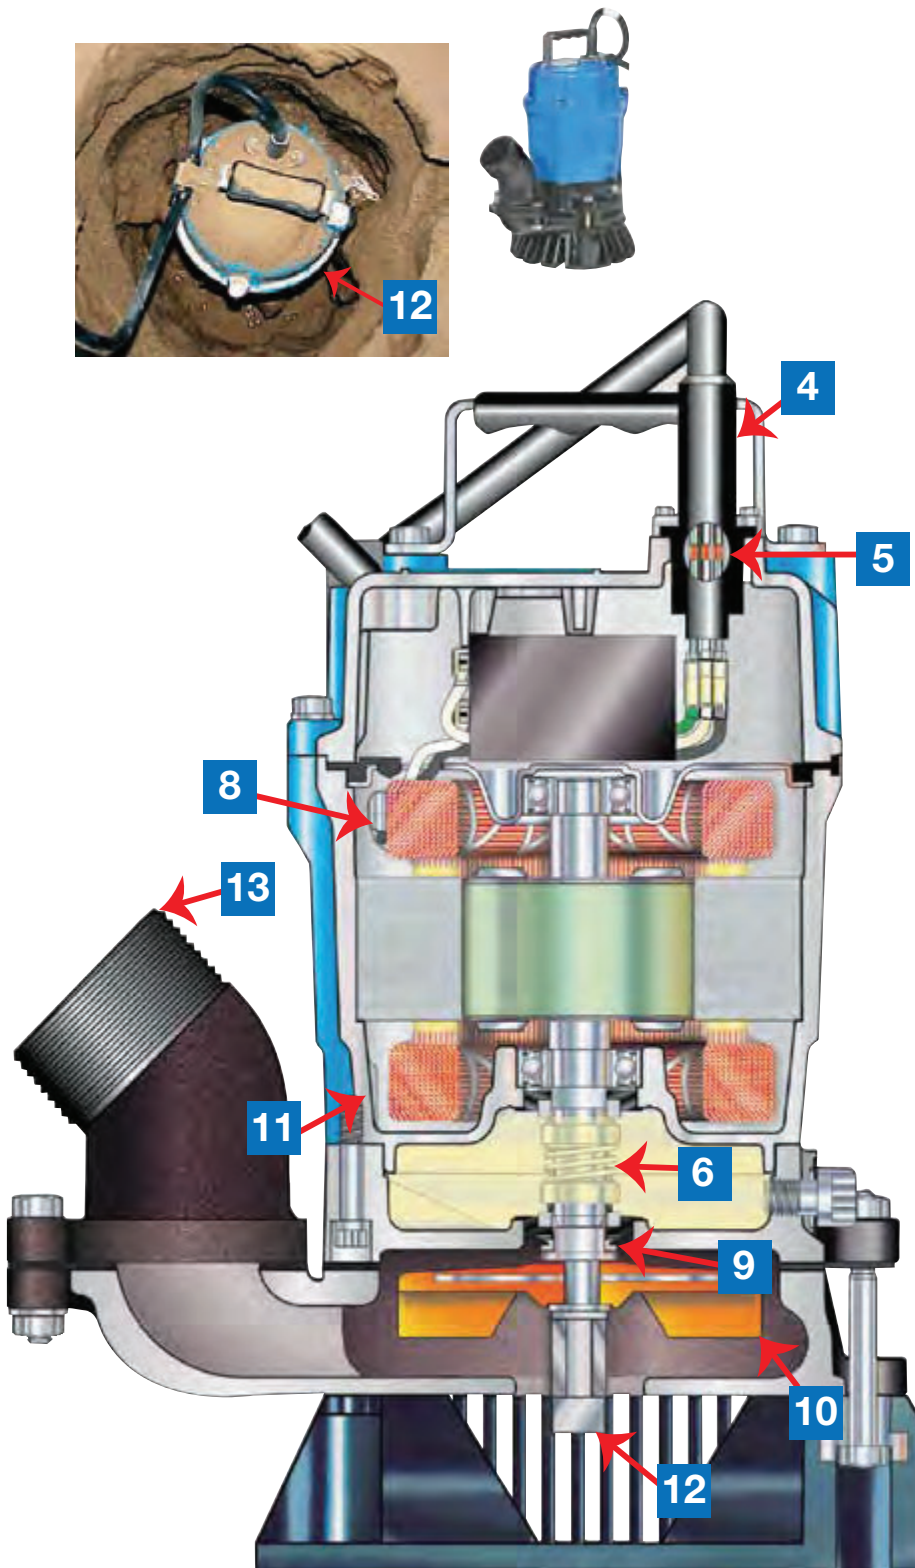

Featured Model HS2.4S

(Not all features available on every Tsurumi submersible pump)

8 MINIATURE THERMAL MOTOR PROTECTOR: Protects against overheating & run-dry.

9 V-RING SEAL PROTECTOR: Protects mechanical seal from abrasive particles.

10 URETHANE, SEMI-VORTEX IMPELLER & WEAR PLATES: Resists wear by abrasive particles and does not depend on close tolerances to maintain pump performance.



Tsurumi Impeller
polished, not worn by
abrasive material.



Competitor Impeller
is effectively worn out.

11 COPPER WINDINGS WITH CLASS E INSULATION

HS Features

12 AGITATOR: Suspends sand and mud, allowing for sediment removal from sumps or basins.


13 45° ANGLED DISCHARGE CONNECTOR: Provides for a more stable installation for either vertical or horizontal discharge hose.

GROUP PERFORMANCE RANGE


Reliable and cost-effective pumps enable Tsurumi to remain an industry leader in the rental and construction markets. Our customers know that while many pumps may look the same, only Tsurumi incorporates the most durable components into the final manufactured product.

GROUP PERFORMANCE RANGE ELECTRIC SUBMERSIBLE PUMPS


Electric Submersible Pumps: Under 1HP

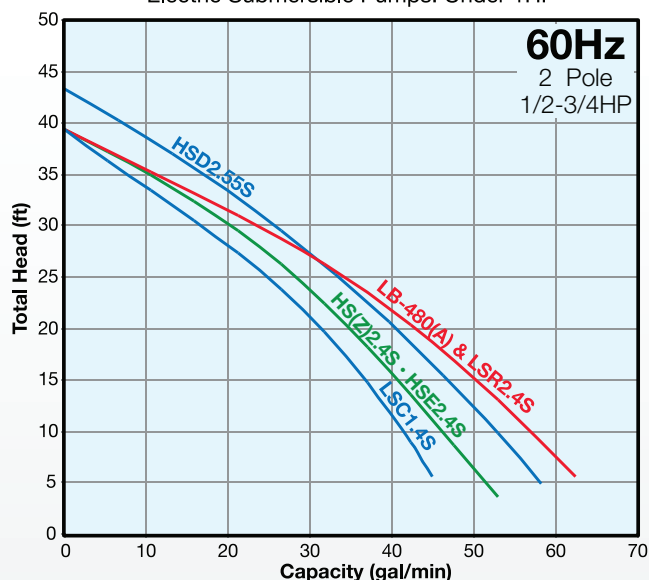

Electric Submersible Pumps: 1HP or more

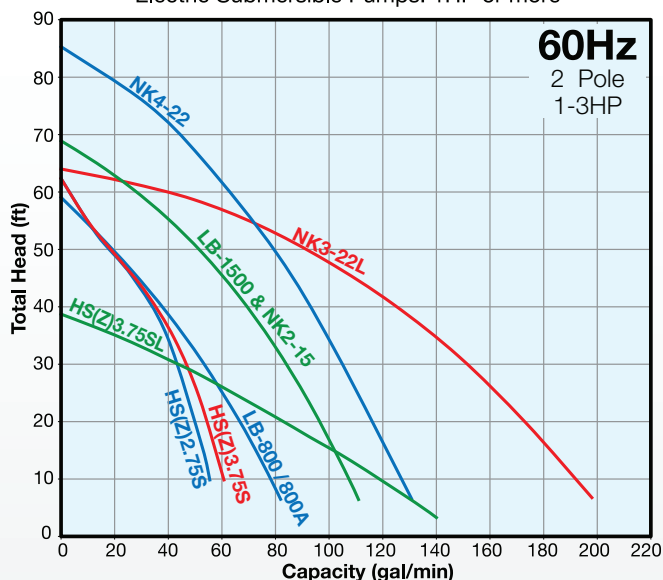

TM(A) Series • UT(Z) Series • 50SQ2-2.4S

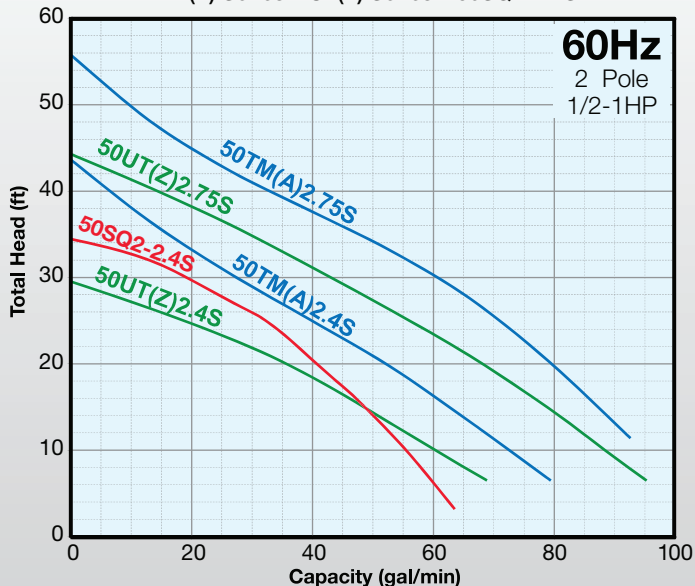

LB-480 • LB-480A - DEWATERING PUMPS

LB-480 Slimline design pump fits into 8" pipes. Powerful pumps built with durable materials in an easy handling design. Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low water levels and extended dry-run capability.

LB-480A features Relay Unit (Level Sensor) which incorporates low voltage, stainless steel probes, epoxy and rubber encapsulated timing relay, that turns the unit off when water is not present. It saves energy and extends the life of the motor and bearings!



LB-480



LB-480A

LB-480 Features

- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces
- V-Ring Seal design protects mechanical seal from abrasive particles

Optional Accessories - See page 24-27



- TS-301 Float Switch for automatic operation
- Discharge hoses
- Quick connect fittings

LB-480A Features

- No control panel or float switches required
- Performs like the non-automatic pump with no special float installation required
- Requires very small space to operate - only 8 3/4" diameter

Technical Features of Automatic (A) Water Level Sensor

- Sensitive electrodes detect water to start pump operation even when foreign materials are present
- Internal 60-second timer eliminates frequent on/off operation in rough water to extend motor life
- Relay sensor completely molded in resin and covered by rubber case for protection against rough handling
- Jobsite tested for more than 30,000 on-off cycles without failure or damage

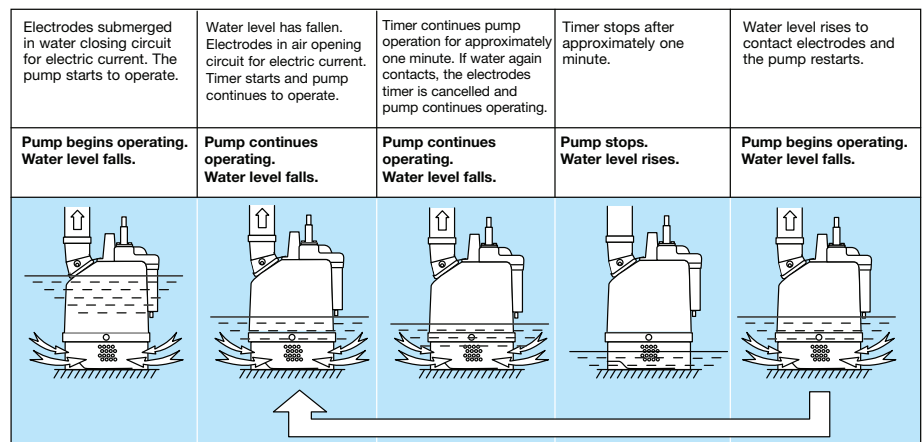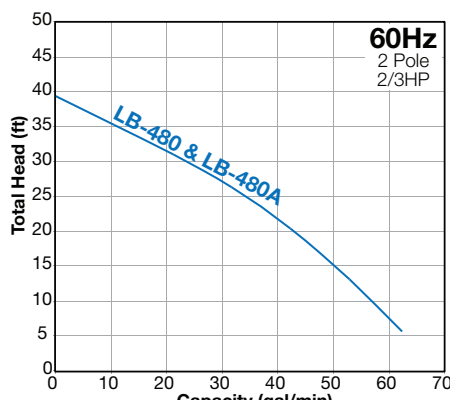

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
LB-480	2/3	Single	2	32	7 11/16	11 1/4	2	28
LB-480A	2/3	Single	2	32	8 3/4	11 1/4	4 1/2*	29

*Pump Starting Water Level

LB-800 • LB-800A - DEWATERING PUMPS

LB-800 Slimline design pumps fits into 8" pipes. Powerful pump built with durable materials in an easy handling design. Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low levels and extended dry-run capability.

LB-800A features Relay Unit (Automatic Water Level Sensor) which incorporates low voltage, stainless steel probes, epoxy and rubber encapsulated timing relay, that turns the unit off when water is not present. It saves energy and extends the life of the motor and bearings!



LB-800



LB-800A

LB-800 Features

- Designed to fit an 8" pipe
- Up to 59' shut off head
- Available in 230V single-phase
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces

Optional Accessories - See page 24-27


- Float Switch for automatic operation (TS-302 for 115V, TS-303 for 230V)
- Discharge hoses
- Quick connect fittings

LB-800A Features

- Up to 59' shut off head
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces

Technical Features of Automatic (A) Water Level Sensor

- Sensitive electrodes detect water to start pump cycling even when foreign materials are present
- Internal 60-second timer eliminates frequent on/off cycling in rough water to extend motor life
- Automatic water level sensor completely molded in resin and covered by rubber case for protection against rough handling.
- Jobsite tested for more than 30,000 on-off cycles without failure or damage

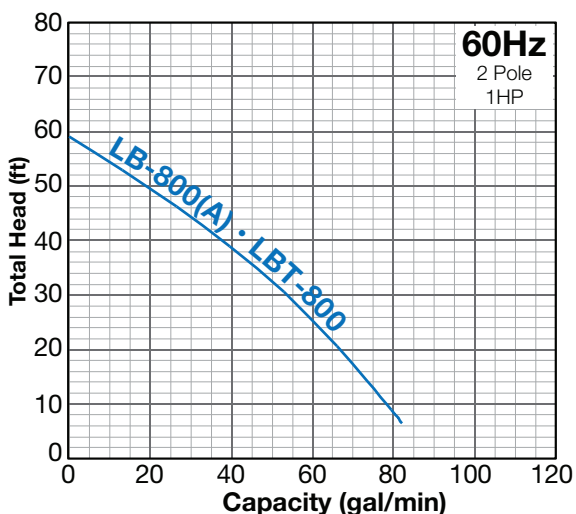


Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
LB-800	1	Single	2	50	7 9/16	13 7/16	2	38
LB-800A	1	Single	2	50	8 3/4	13 7/16	6 3/4*	39

*Pump Starting Water Level

LB-1500 - DEWATERING PUMPS

LB-1500 Slimline design pumps fit into 8" pipes. Powerful pump built with durable materials in an easy handling design. Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low levels and extended dry-run capability.

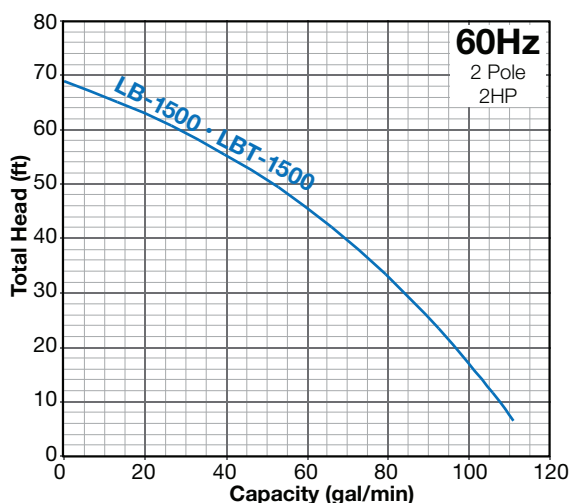

LB-1500 Features

- Circle Thermal Motor Protector: Protects against overheating, over amperage & run-dry
- Anti-Wicking Block: Prevents water incursion due to capillary wicking should the power cable be damaged or the end submerged
- Oil Lifter: Lubricates the seal faces and extends seal life by ten times using no additional power, even when oil is down to 1/3 normal level.
- Dual inside mechanical seals with silicon carbide faces, (both top and bottom) running in an oil filled chamber provides for the most durable seal design available
- High Chrome Iron Semi-Open Impeller resists wear from abrasive particles
- Synthetic Rubber Pump Casting: For wear resistance and easy maintenance
- V-Ring System: Protects the shaft seals

Optional Accessories - See page 24-27

- Float switch TS-304
- Discharge hoses
- Quick connect fittings
- Control panel
- 2" discharge

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
LB-1500	2	Single	3 (2)*	50	7 3/8	23 5/16	3 1/8	88

*2" is optional

HS • HSZ • HSE - TRASH PUMPS

HS / HSZ / HSE Series TRASH PUMPS: Durable trash pumps in two sizes—a 1HP 3-inch discharge and a 1/2HP 2-inch discharge. Both designed to pump water containing sand, solids and debris with minimal wear and clogging. HS2.4S / 2.75S / 3.75S / 3.75SL are manual trash pumps, and HSZ2.4S / 2.75S / 3.75S / 3.75SL are automatic trash pumps with integrated float switches. HSE2.4S is a HS2.4S trash pump with Automatic Water Level Sensor.



HS2.4S




HS2.75S



HSZ3.75S



HSE2.4S

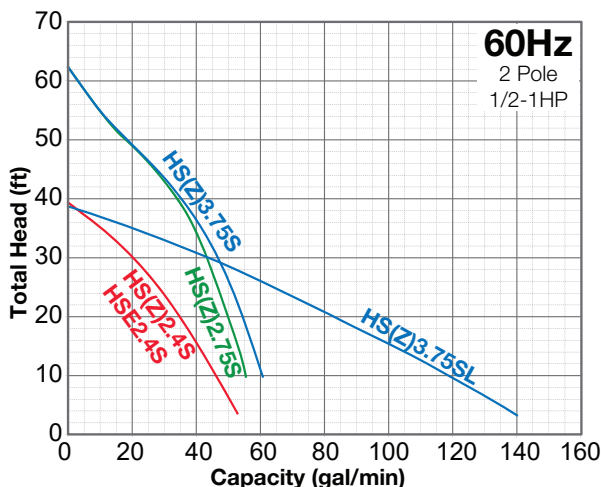

HS • HSZ • HSE TRASH PUMP Features

- Built-in shaft mounted agitator suspends solids
- Urethane Semi Vortex Impeller for maximum durability and pump performance
- Dual Inside Mechanical Seal With SiC faces provides longest operational life
- Oil Lifter provides lubrication of the seal faces
- V-Ring Seal design protects mechanical seal from abrasive particles

Technical Features of Automatic (E) Water Level Sensor*


* not for use in distilled or deionized water

- Sensitive electrodes detect water to start pump operation even when foreign materials are present
- Internal 60-second timer eliminates frequent on/off operation in rough water to extend motor life
- Automatic water level sensor completely molded in resin and covered by rubber case for protection against rough handling.
- Jobsite tested for more than 30,000 on-off cycles without failure or damage

Optional Accessories - See page 24-27

- Vertical discharge coupling
- 2-inch NPT coupling available for HS(Z)3.75S

HSZ2.4S / 2.75S / 3.75S(L) Pump Dimension Reference

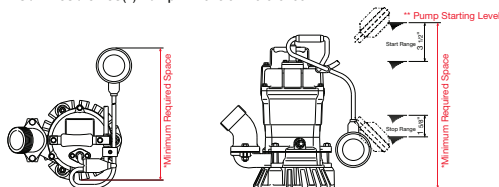

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Float Start Level	Float Stop Level	Shipping Weight (lbs.)
					Diameter	Height				
HS2.4S	1/2	Single	2	20	10 1/16	12 15/16	3 1/2	N/A		30
HSZ2.4S	1/2	Single	2	20	13 1/2*	15 1/8*	15 1/8*	15 1/8	4 3/4	30
HSE2.4S	1/2	Single	2	32	10 1/16	14 1/8	6 1/2	N/A		30
HS2.75S	1	Single	2	32	11 7/16	15 5/16	3 1/2	N/A		47
HSZ2.75S	1	Single	2	32	13 1/2*	17 1/2*	17 1/2*	17 1/2	7 1/8	47
HS3.75S	1	Single	3*	32	12 7/16	15 5/16	3 1/2	N/A		50
HS3.75SL	1	Single	3	32	12 7/16	16 3/4	4 3/4	N/A		55
HSZ3.75S	1	Single	3*	32	13 1/2*	17 1/2*	17 1/12*	17 1/2	7 1/8	50
HSZ3.75SL	1	Single	3	32	15 3/4*	19 7/8*	19 7/8*	19 7/8	7 1/8	55


*2" is optional

*Minimum Required Space

*Pump Starting Level

HSD - EXTREME DUTY TRASH PUMP

EXTREME DUTY TRASH PUMP: Pumps water containing sand, solids and debris with minimal wear and clogging.

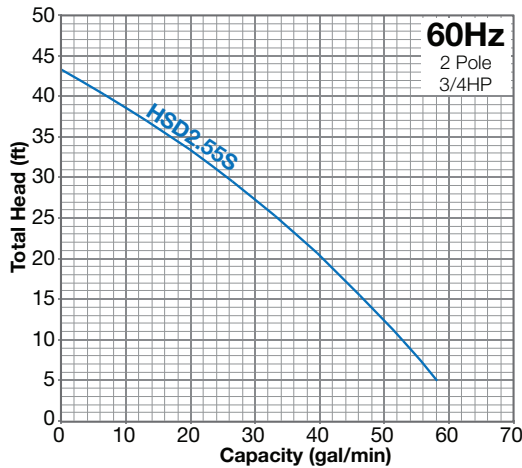

HSD2.55S Trash Pump Features

- Anti-wicking block prevents water incursion
- Oil Lifter extends seal life by ten times
- Dual Inside Mechanical Seal with silicon carbide faces provides longer operational life of any seal available
- V-Ring Seal design protects mechanical seal from abrasive particles
- Built-in larger shaft mounted agitator suspends solids & eliminates clogging
- High Chromium Iron impeller & agitator
- Ductile iron pump casing
- 3/4 HP motor; larger than HS2.4S
- Easy pump end disassembly

Optional Accessories - See page 24-27


- Float switch • Straight discharge
- Discharge hoses • Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
HSD2.55S	3/4	Single	2	32	10 3/8	15 3/8	4 1/8	38

NK - HEAVY DUTY HIGH HEAD PUMP

Heavy duty, single phase high head pumps capable of handling abrasive materials with minimal wear.

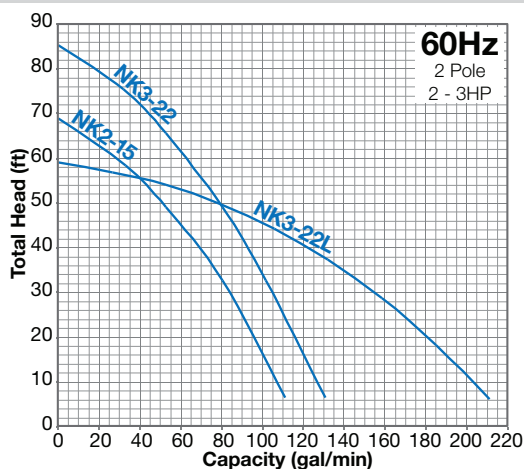

NK2-15 • NK4-22 • NK3-22L Features

- Terminal board for voltage reconnect allows for change from 110V to 220V (NK2-15 only)
- NK2-15 & NK4-22: Semi Vortex Impeller and Synthetic Rubber Wear Plates for maximum durability and maintaining pump performance
- NK3-22L: Semi-Open Impeller
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces
- V-Ring Seal design protects mechanical seal from abrasive particles

Optional Accessories - See page 24-27

- TS-303 & TS-304 Float Switch for automatic operation
- Sand kit • 2" NPT coupling • Control panel
- Discharge hoses • Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
NK2-15	2	Single	3*	32	9 7/16	24 1/2	3 1/4	80
NK4-22	3	Single	3*	32	9 7/16	24 3/16	3 1/4	81
NK3-22L	3	Single	3*	32	9 1/4	26 1/2	4 3/4	90

LSC • LSR - GROUND DRAINAGE PUMP

LSC DRAINAGE PUMP: Original residue dewatering pump; able to pump down to the floor, even the smallest puddle can be pumped dry. LSC drainage pump is the best for complete drainage of flat surfaces where a sump is not available.


LSR DRAINAGE PUMP: Pump holds suction for drainage to 0.4 inch water level.



LSC1.4S



LSR2.4S

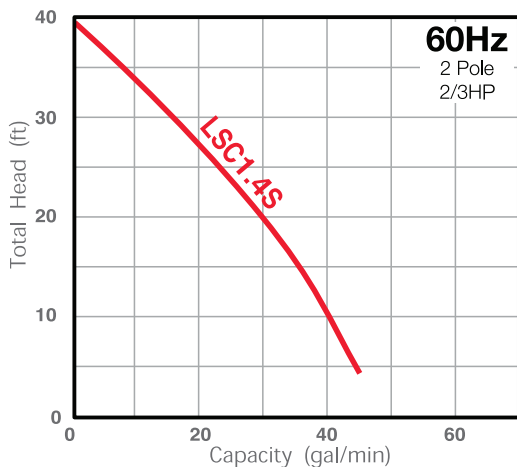


LSC1.4S Features

- Prime pump through discharge outlet for start up at any water level
- Internal check valve holds prime and prohibits back flow through pump when stopped
- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces
- V-Ring Seal protects mechanical seal from abrasive particles

Optional Accessories - See page 24-27

- SLS-LSC20 Automatic operation surface level switch
- 2" Discharge
- Discharge hoses
- Quick connect fittings

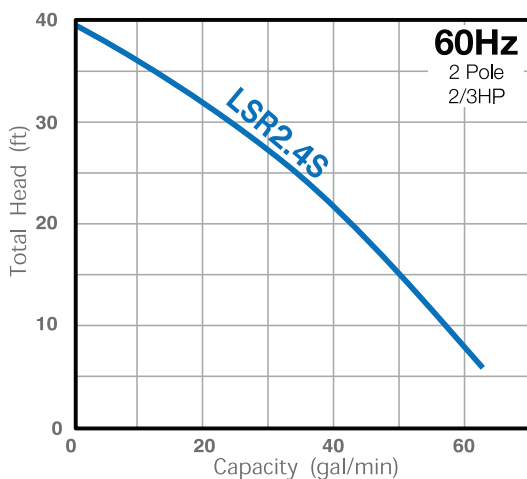

LSR2.4S Features

- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces
- V-Ring Seal protects mechanical seal from abrasive particles

Optional Accessories - See page 24-27

- SLS-LSR32 Automatic operation surface level switch
- Discharge hoses
- Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
LSC1.4S	2/3	Single	3/4	20	7 11/16	12 7/16	0.04	29


Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
LSR2.4S	2/3	Single	2	32	8 1/4	11 3/8	0.2	27


F-13 • L4000 - UTILITY PUMP

F-13: Oil free economical submersible pump for clean, surface water applications. Available ready to plug-in, with built-in level control, 1 1/4" or 3/4"NPT discharge.

L4000: Designed to meet and exceed the tough demands of commercial and recreational duty. 12VDC operation.



F-13

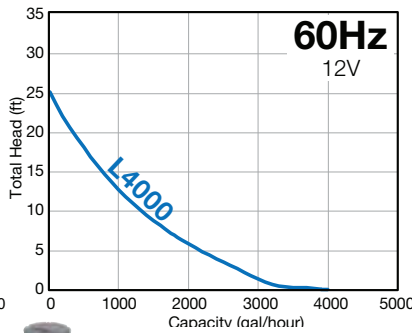

L4000

F-13 Features

- Completely oil free air filled motor protected by 3 oil seals
- Built-in thermal motor protector
- Incorporates a check valve built into the discharge
- Pump can be operated either manual or automatic
- 1-1/4" NPT discharge with garden hose adaptor (3/4")
- Easy grip handle design

L4000 Features


- 1 1/2" and 2" Discharge Ports
- Liquid Cooled Motor
- Universal Mounting Base
- Double-Ball Bearing
- Mechanical Shaft Seal
- Salt Water Tough
- 12VDC Motor

Model	Max. Capacity (GPM)	Max. Head (ft)	Discharge Size (in.) - Internal Thread	Nominal HP	RPM	Rated Current at 115V (amps)	Standard Cable Length (ft)	Shipping Weight (lbs.)
F-13	38	19	1 1/4 or 3/4	1/4	3450	4.2	20	11

Model	Max. Capacity (GPH)	Max. Head (ft.)	Body Material	Discharge Size (in.) & Parts Material	Impeller	Shaft Seal	Voltage (V) /Amps	Standard Cable Length (ft.)	Shipping Weight (lbs.)
L-4000	4000	25	High Impact ABS Thermo-Plastic	1-1/2 & 2 Polypropylene	Glass/Nylon Composite	Mechanical (Carbon/Ceramic)	12 / 19.5	6	6

UT • UTZ - SINGLE PHASE CAST IRON SUBMERSIBLE SEWAGE PUMP

UT • UTZ Series pumps are compact economical cast iron pumps that is designed for a wide range of applications.

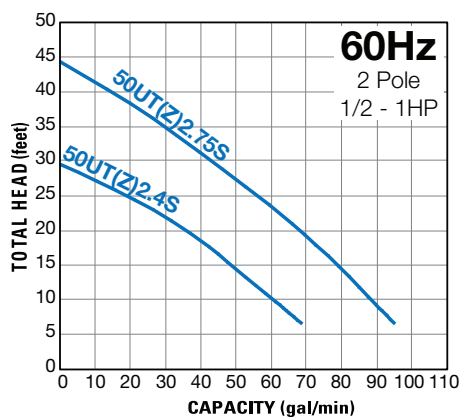

UT • UTZ Series Features

- LARGE DIAMETER PASSAGE - UT & UTZ pumps have a large passage (1.4") that makes it ideal for liquid containing various solids
- Heat resistant Silicon Carbide Mechanical Seals assist in cooling in the event of run-dry situations
- Motor protector protects against overheat and run-dry
- Semi-vortex, PPO resin impeller passes solids and stringy material without clogging
- Available in both manual operation (UT) and automatic operation equipped with a float (UTZ)




Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
50UT2.4S	1/2	Single	2	20	9 1/2	11 3/4	11 3/4	35
50UTZ2.4S	1/2	Single	2	20	11 5/8	15 3/4	15 3/4	35
50UT2.75S	1	Single	2	32	9 1/2	16	13 3/4	46
50UTZ2.75S	1	Single	2	32	11 5/8	18	18	46

SQ - 50SQ2-2.4S SINGLE PHASE PORTABLE CORROSION-RESISTANT PUMP

The SQ pump features a top discharge, flow-thru design with forced motor cooling that enables extended running at low water level. In addition, the SQ pump fits into an 8-inch pipe.

50SQ2-2.4S

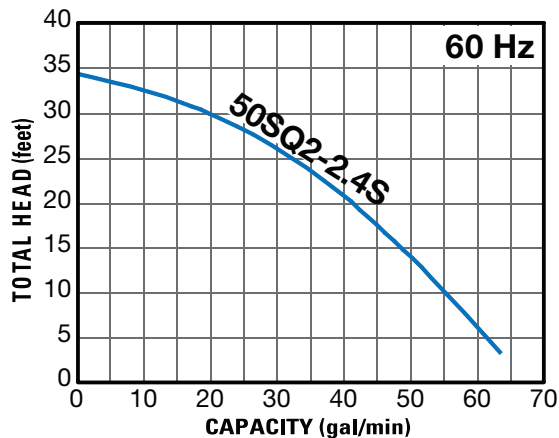



50SQ2-2.4S Features

- Constructed of a combination of 304 and 316 stainless steel materials, Nitrile Butadiene Rubber and special resin to stand up to rust and corrosion, and sport a new structural design that makes them even lighter and easier to carry
- Non-toxic white mineral oil used to lubricate mechanical seals
- Motor protector protects against overheating and run-dry
- Designed to fit into an 8-inch pipe

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
50SQ2-2.4S	1/2	Single	2	32	7 1/16	14 7/16	2 3/8	27

TM • TMA - SINGLE PHASE TITANIUM SEAWATER PUMP

Titanium construction, semi-vortex solids handling impeller. Ideal for saltwater and chemical applications.

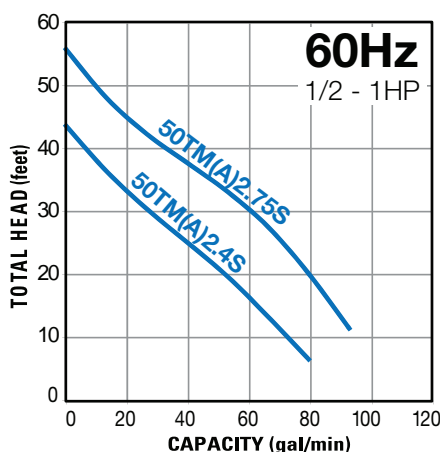

TM / TMA Series Features

- Titanium and FRP components increases corrosion resistance in a wide variety of applications
- Ideal use for salt water, site drainage and bilge pumps
- Available in manual operation (TM) and automatic operation (TMA)


Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
50TM2.4S	1/2	Single	2	32	9 15/16	14 3/16	12 3/4	20
50TMA2.4S	1/2	Single	2	32	13	14 3/4	23 7/8*	21
50TM2.75S	1	Single	2	32	9 15/16	14 15/16	13 5/8	25
50TMA2.75S	1	Single	2	32	13	15 1/2	24 5/8*	26

* Pump Starting Water Level

ENGINE DRIVEN PUMPS CENTRIFUGAL PUMP • TRASH PUMP • TRAILER MOUNTED

TSURUMI Engine Powered Pumps are constructed for maximum durability in a compact, easy handling design. Utilizing superior features and materials, Tsurumi provides an affordable, high value pump line designed to withstand your tough dewatering applications.

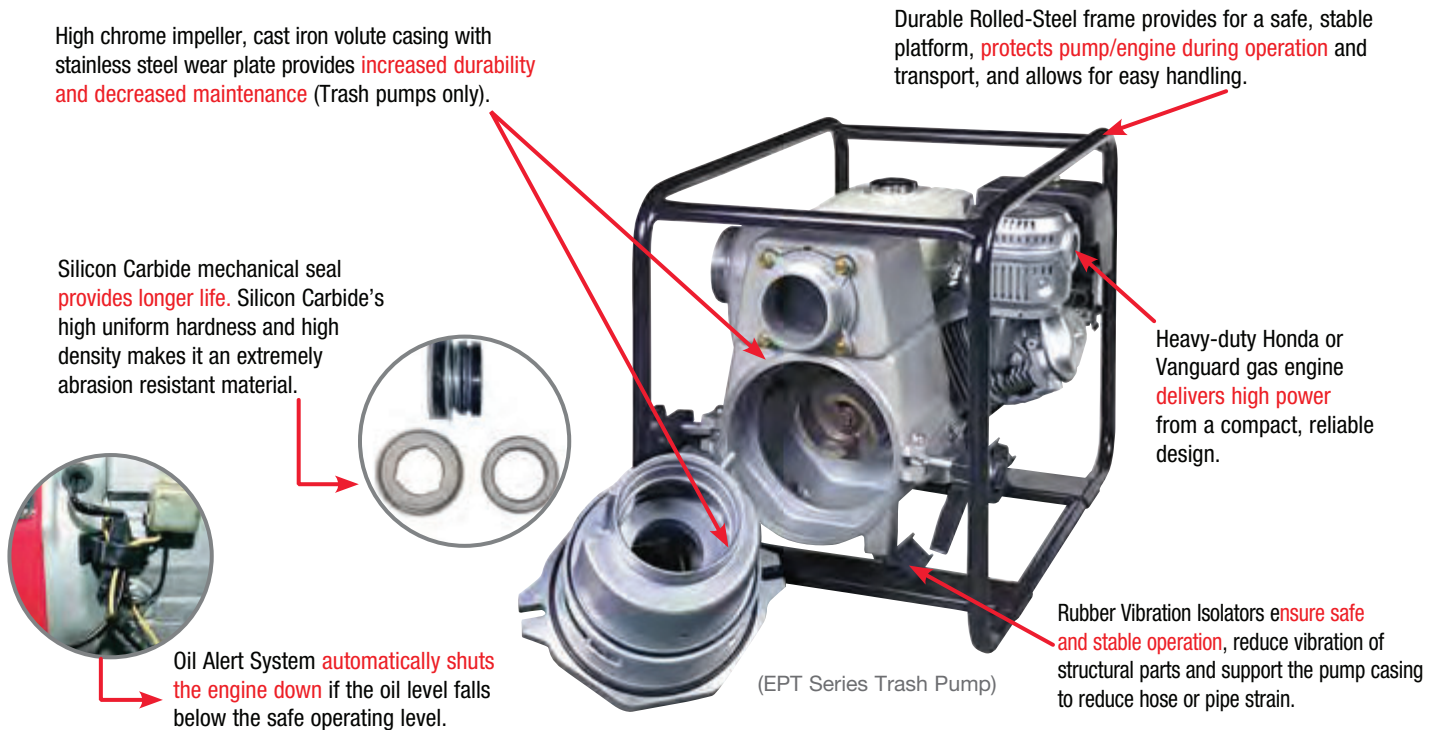

TE SERIES GAS ENGINE CENTRIFUGAL PUMPS



TE3-50HA
2" Centrifugal Pump
Powered by Honda



TE3-50V
2" Centrifugal Pump
Powered by Vanguard



TE3-80HA
3" Centrifugal Pump
Powered by Honda



TE3-80V
3" Centrifugal Pump
Powered by Vanguard



TE2-100HA
4" Centrifugal Pump
Powered by Honda



TE2-25H
1" Compact Centrifugal Pump
Powered by Honda

EPT SERIES GAS ENGINE TRASH PUMPS




EPT3-50HA
2" Trash Pump
Powered by Honda




EPT3-50V
2" Trash Pump
Powered by Vanguard




EPT3-80HA
3" Trash Pump
Powered by Honda



EPT3-100HA
4" Trash Pump
Powered by Honda



EPT3-100V
4" Trash Pump
Powered by Vanguard



THP-4070HA
1" / 1.5" High Pressure Pump
Powered by Honda

THP HIGH PRESSURE PUMP

TE SERIES - GAS ENGINE CENTRIFUGAL PUMPS

Tsurumi TE Series centrifugal pumps are powerful & lightweight pumps powered by heavy-duty **Honda** and **Vanguard engines**. Available in 1", 2", 3" and 4" NPT coupling suction sizes.



TE2-25H



TE3-50HA




TE3-50V






TE3-80HA



TE3-80V



TE2-100HA

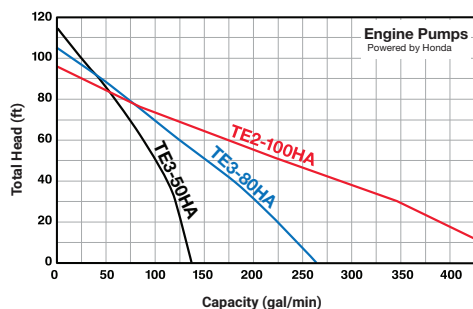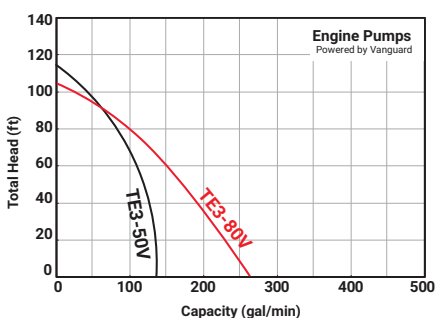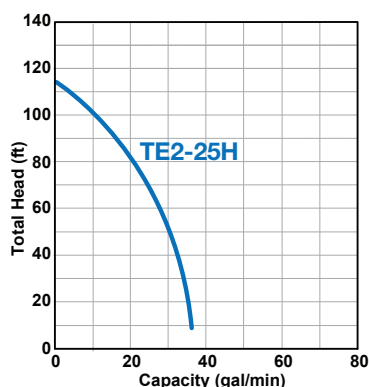

TE Series Features

- Heavy-duty Honda gas engine with oil sensor and Silicon Carbide mechanical seal provides longer life
- Cast Iron impeller and volute casing
- Durable Rolled-Steel frame provides pump/engine with maximum protection, perfect ease of handling or transport, and safe operation
- Rubber mounts on the pump and the frame
- Suction strainer included (TE2-25H)
- 1", 2" and 3" models are light enough for parcel shipment

Optional Accessories - See page 24-27

Hose Kit, Hoses, Hose accessories, Wheel Kit



Model	Discharge / Suction Size	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
				Length	Width	Height	
TE2-25HA	1" NPSH Coupling	Honda GX-25	1.1 / 2220	9	14	13	16
TE3-50HA	2" NPT Coupling	Honda GX-120	4.0 / 3600	18 1/2	14 5/8	17 1/8	54
TE3-50V	2" NPT Coupling	Vanguard 160	5.0 / 3600	19 15/16	15 11/16	17 15/16	62
TE3-80HA	3" NPT Coupling	Honda GX-160	5.5 / 3600	20 1/2	16 1/2	18 1/8	64
TE3-80V	3" NPT Coupling	Vanguard 160	5.0 / 3600	19 15/16	15 11/16	17 15/16	64
TE2-100HA	4" NPT Coupling	Honda GX-240	8.0 / 3600	25	18	23 1/2	109

EPT SERIES - GAS ENGINE TRASH PUMPS


Tsurumi EPT Series centrifugal pumps are powerful & lightweight pumps powered by heavy-duty **Honda** and **Vanguard** engines. Available in 1", 2", 3" and 4" NPT coupling suction sizes.




EPT3-50HA




EPT3-50V





EPT3-80HA



EPT3-100HA



EPT3-100V

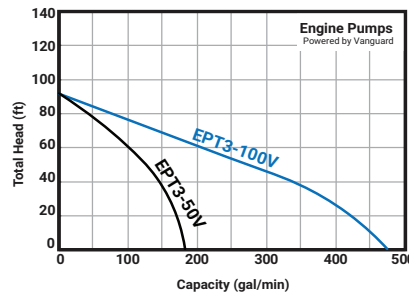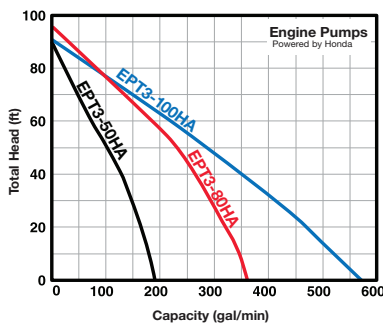


EPT Series Features

- Heavy-duty Honda gas engine with oil sensor delivers high power from a compact, reliable design. Silicon Carbide mechanical seal provides longer life
- High Chrome impeller, Cast Iron volute casing plus Stainless Steel wear plate promise increased durability and decreased maintenance
- Pump/engine set mounted to cage frame on Rubber Vibration Cushions to buffer stress and wear
- Durable Rolled-Steel frame provides pump/engine with maximum protection, perfect ease of handling or transport and safe operation
- Wheel Kit for easy transportation available with all trash pumps as an optional accessory

Optional Accessories - See page 24-27

Hose Kit, Hoses, Hose accessories, Wheel Kit

Tsurumi EPT Series Engine Trash Pump

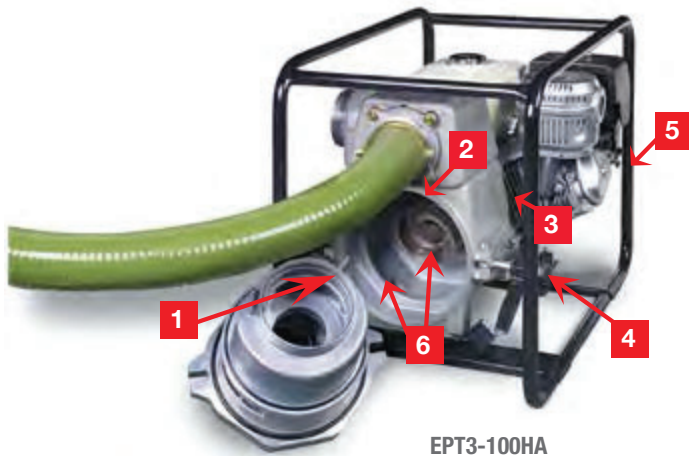



EPT3-100HA

- 1 The clean-out door can be disassembled easily without taking off suction hose.
- 2 Designed with larger pump casing.
- 3 Heavy-duty Honda gas engine.
- 4 Mounted to cage frame on Rubber Vibration Cushions.
- 5 Durable rolled-steel frame.
- 6 High Chrome impeller, cast Iron volute casing, stainless steel wear plate

Model	Discharge / Suction Size	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
				Length	Width	Height	
EPT3-50HA	2" NPT Coupling	Honda GX-160	5.5 / 3600	23 1/4	18 1/4	17 3/8	92
EPT3-50V	2" NPT Coupling	Vanguard 160	5.0 / 3600	23 5/8	17 1/8	17 5/8	88
EPT3-80HA	3" NPT Coupling	Honda GX-240	8.0 / 3600	27 1/2	20 1/8	25 5/8	140
EPT3-100HA	4" NPT Coupling	Honda GX-340	14.0 / 3600	30 1/8	20 1/8	26	157
EPT3-100V	4" NPT Coupling	Vanguard 400	11.0 / 3600	28 15/16	20 1/4	22 3/8	157

THP - GAS ENGINE HIGH PRESSURE PUMP

High pressure and high performance: A pump for sprinkling, irrigation and fire protection.

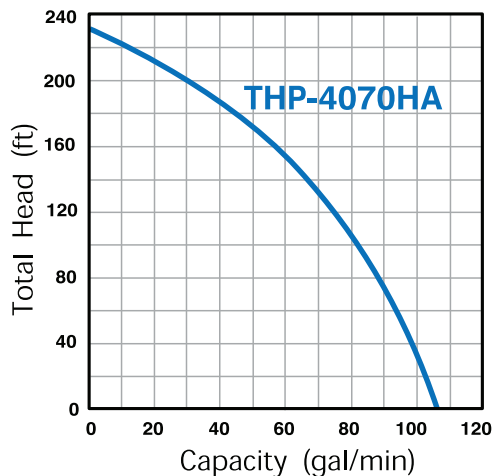

THP Series Features

- Heavy-duty Honda gas engine with oil sensor and Silicon Carbide mechanical seal provides longer life
- Maximum pressure of 100 PSI for high pressure applications
- Versatile 3-way discharge allows pump to run up to three discharge lines simultaneously
- Two 1" couplings and one 1 1/2" coupling
- High head, closed impeller and cast iron volute casing deliver high performance and long wear life


Optional Accessories - See page 24-27

- 1" or 1.5" Lexan nozzle
- 1" or 1.5" Mill hose
- 1" or 1.5" Suction hose

Model	Discharge Size	Suction Size	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
					Length	Width	Height	
THP-4070HA	1" x 2, 1.5" x 1 NPSH Coupling	1.5" NPSH Coupling	Honda GX-160	5.5 / 3600	21	16	18	62

TD6 DIAPHRAGM PUMP - GAS & ELECTRIC

Capable of continuous dry operation for seepage dewatering. Handles sand, mud and sludge. Both HONDA GX120 engine driven (TD6 Series) and electric motor (TDE6 Series) diaphragm pumps are available.

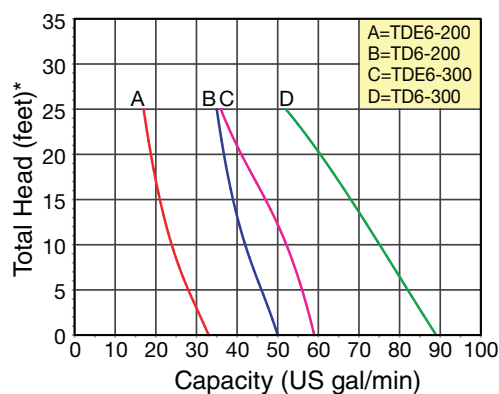

(*) Convert to psi, divide by 2.31 Liquid - Water specific gravity 1.0

TD6 / TDE6 Diaphragm Pumps Features powered by Honda

- Sand cast aluminum construction for portability and durability
- Thermoplastic rubber diaphragm
- 2" or 3" NPT suction and discharge size
- 1-5/8" diameter solids handling capability
- Modular component design permits easy maintenance and cleanout
- Gas engine model: Honda GX120 (TD6) / Electric motor model (TDE6)
- Delivers up to 88 GPM (TD6-300) / 59 GPM (TDE6-300)
- 90° Rotatable base on all models
- Maximum temperature 180°F

Optional Accessories - See page 24-27

- Suction hose kits
- Discharge hose kits

Model	Discharge / Suction Size (inches)	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
				Length	Width	Height	
TD6-200	2" NPT Coupling	Honda GX-120	4 / 3600	43	20	23	165
TD6-300	3" NPT Coupling	Honda GX-120	4 / 3600	43	26	23	175
TDE6-200	2" NPT Coupling	N/A	4 / 1725	44	20	23	175
TDE6-300	3" NPT Coupling	N/A	4 / 1725	44	26	23	185

EPT5 MOUNTED TRASH PUMP


Industrial duty 6-inch trash pump: Powered by Honda gas engine / Kohler diesel engine.



EPT5-150HA (Honda Gas Engine)

EPT5-150KD (Diesel Engine) Trash Pump Features

- Cast Aluminum Casing and Adapter
- Cast Iron Wear Plate, Volute and Manifold
- Stainless Steel Impeller
- Silicon Carbide Mechanical Seal and Buna O-Rings and Flapper / Check Valve
- 6" NPT Port Size
- Self Priming to 20ft
- Available with Honda GX670 Gas Engine or a Diesel Engine (Final Tier 4)
- Solids Handling to 3" Diameter
- Unique Slide Mechanism permits complete service of pump without removing hoses or removing pump components from trailer
- Includes Seal Wash Feature for extended seal life
- 12 VDC Electric Start; Digital Tachometer / hourmeter included
- D.O.T. Approved Trailer - See your state and local codes for registration

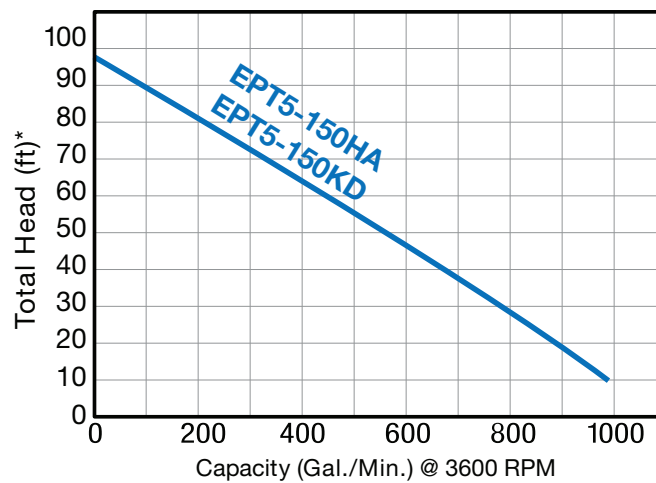

* Convert to PSI , divide by 2.31 • Liquid-Water specific gravity 1.0

Model	Discharge Suction Size (inches)	Engine Type	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
					Length	Width	Height	
EPT5-150HA	6" NPT Coupling	Unleaded Gasoline	Honda GX-670	24.0 / 3600	99	48	60	1125
EPT5-150KD	6" NPT Coupling	Diesel	Call for more Info	23.4 / 3600	99	48	60	1250

SPECIFICATIONS - SINGLE PHASE PUMPS: LB • HS(Z) • HSE • HSD

		LB-480	LB-480A	LB-800	LB-800A	LB-1500	HS2.4S	HS2.2.4S	HS2.75S	HS2.75S	HS3.75S	HS3.75S	HS3.75SL	HS3.75SL	HSE2.4S	HS2.2.55S
		2" Dewatering Pump	2" Auto Dewatering Pump	2" Slimline Pump	2" Auto Slimline Pump	3" Slimline Pump	2" Sand/Solid Trash Pump	2" Auto Trash Pump	2" Sand/Solid Trash Pump	2" Auto Trash Pump	3" Sand/Solids Trash Pump	3" Auto Trash Pump	3" Sand/Solids Trash Pump	3" Auto Trash Pump	2" Trash Pump with Auto Water Level Sensor	2" Extreme Durable Sand Pump
FLUID	Max. Capacity (GPM)	63		82		111	53		55		61		132		53	58
	Max. Head (ft.)	40		59		69	39		62		62		36		39	43
	Solid Diameter (in.)	0.236						0.276					0.393			
PUMP	Impeller	Semi-Vortex				Semi-Open	Semi-Vortex									
	Impeller Material	Urethane Rubber				High Chrome	Urethane Rubber									High Chrome
	Casing Material	Ethylene Propylene Rubber		Butadiene Rubber & Natural Rubber		Butadiene Rubber & Natural Rubber & Steel	Gray Iron Casing									Ductile Iron Casing
	Wear Plate Material	Urethane Rubber				Natural Rubber	Integral Part of Casing									
	Shaft Seal - Type / Material	Double Inside Mechanical Seal with Silicon Carbide faces on lower seals and Carbon Ceramic Faces on upper seals														
	Seal Lubricant - Type	SAE 10W/20W or Turbine Oil (ISO VG32)														
	Seal Lubricant Amount (oz.)	5.2				12.5	5.4									
	Seal Protection	V-Ring and Oil Lifter														
MOTOR	Discharge Connection	2" MNPT Coupling				3" MNPT Coupling (2" is optional)	2" MNPT Coupling		2" MNPT Coupling		3" MNPT Coupling (2" optional)		3" MNPT Coupling		2" MNPT Coupling	
	Motor Output (HP)	2/3		1		2	1/2		1		1		1		1/2	3/4
	Phase	Single Phase														
	Voltage (V)	115 or 230	115	115 or 230			115 or 230		115		115 or 230			115	115	
	Amperage - Rated Current	5.9 (115V) 3.0 (230V)	5.9 (115V)	10.5 (115V) 5.2 (230V)		26.2 (115V) 13.2 (230V)	5.2 (115V) 2.7 (230V)		10.0 (115V)		9.7 (115V) 4.9 (230V)			5.2 (115V)	7.3 (115V)	
	Amperage - Starting Current	12.4 (115V) 5.9 (230V)	12.4 (115V)	20.6 (115V) 12.6 (230V)		112 (115V) 56 (230V)	12.4 (115V) 5.9 (230V)		29.7 (115V)		29.7 (115V) 18.5 (230V)			12.4 (115V)	19.0 (115V)	
	Type	Continuous Duty, Air Filled, 3600 RPM, 60Hz														
	Bearings	Double shielded, permanently lubricated, high-temp C3 with B-10 life of 60,000 hours														
	Insulation Class	E				B	E									
	Motor Protection (Built-In)	Miniature Protector		Circle Thermal Protector			Miniature Protector		Circle Thermal Protector						Miniature Protector	Circle Thermal Protector
	Plug Configuration (NEMA)	5-15P (115V) No Plug (230V)		5-15P (115V) No Plug (230V)		No Plug	5-15P (115V) No Plug(230V)		5-15P (115V) No Plug (230V)							
	Cable - # of Conductors x AWG	3C x 16AWG		3C x 14AWG		3C x 12AWG (115V) 3C X 12AWG (230V)	3C x 16AWG		3C x 14AWG						3C x 16AWG	
	Standard Cable Length (ft.)	32		50			20		32						32	32
	Max. Cable Length (ft.)	110 (115V) 420 (230V)	110 (115V)	100 (115V) 400 (230V)		70 (115V) 160 (230V)	125 (115V) 460 (230V)		100 (115V) 430 (230V)						120 (115V)	90 (115V)
	Recommended Generator Capacity (watts)	1230		2240		7320	1230		3190						1230	2100
Optional Float Switch	TS-301	N/A	TS-302 (115V) TS-303 (230V)	N/A	TS-303 (230V) operation only	TS-301 (115V)	N/A	TS-302	N/A	TS-302	N/A	TS-302	N/A	N/A	TS-301	
DIMENSION	Diameter (in.)	7 11/16	8 3/4	7 9/16	8 3/4	7 3/8	10 1/16	13 1/2	11 7/16	13 1/2	12 7/16	13 1/2	12 7/16	15 3/4	10 1/16	10 3/8
	Height (in.)	11 1/4	11 1/4	13 7/16	13 7/16	23 5/16	12 15/16	15 1/8	15 5/16	17 1/2	15 5/16	17 1/2	16 3/4	19 7/8	14 1/8	15 3/8
	Continuous Running Water Level (C.W.L.) (in.)	2	4 1/2 (Pump Starting Water Level)	2	6 3/4 (Pump Starting Water Level)	3 1/8	3 1/2	15 1/8 (Pump Starting Water Level)	3 1/2	17 1/2 (Pump Starting Water Level)	3 1/2	17 1/2 (Pump Starting Water Level)	4 3/4	19 7/8 (Pump Starting Water Level)	6 1/2 (Pump Starting Water Level)	4 1/8
	Shipping Weight (lbs.)	28	29	38	39	88	30	30	47	47	50	50	55	55	30	38

SPECIFICATIONS - SINGLE PHASE PUMPS: LSR • LSC • NK • SQ • UT(Z) • TM(A)

		LSR2.4S	LSC1.4S	NK2-15	NK4-22	NK3-22L	50SQ2-2.4S	50UT2.4S	50UT2.4S	50UT2.75S	50UT2.75S	50TM2.4S	50TMA2.4S	50TM2.75S	50TMA2.75S
FLUID	Max. Capacity (GPM)	63	45	111	131	211	63	69		95		79		92	
	Max. Head (ft.)	40	39	69	85	59	34	29.5		44		44		56	
	Solid Diameter (in.)	0.236		0.334			0.236	1.4				0.394			
PUMP	Impeller	Semi-Vortex				Semi-Open	Semi-Vortex	Semi-Vortex				Semi-Vortex			
	Impeller Material	Urethane Rubber		Ductile Iron Casing		High Chrome	304 Stainless Steel	PPO Plastic				PPO Plastic			
	Casing Material	Ethylene Propylene Rubber				Cast Iron	304 Stainless Steel	Cast Iron				ABS Plastic			
	Wear Plate Material	Urethane Rubber		Integral Part of Casing		Ductile Iron Casing	304 Stainless Steel	---				---			
	Shaft Seal - Type / Material	Double Inside Mechanical Seal with Silicon Carbide faces on lower seals and Carbon Ceramic Faces on upper seals													
	Seal Lubricant - Type	SAE 10W/20W or Turbine Oil (ISO VG32)										White Mineral Oil (ISO VG32)			
	Seal Lubricant Amount (oz.)	5.1	5.2	9.1			5.4	5.4		7.8		8.1			
	Seal Protection	V-Ring and Oil Lifter										Oil Lifter			
	Discharge Connection	2" MNPT Coupling	3/4" MNPT Coupling	3" MNPT Coupling (2" optional)			2" FNPT Flange	2" MNPT Coupling				2" FNPT Flange			
	MOTOR	Motor Output (HP)	2/3		2	3		1/2	1/2		1		1/2		1
Phase		Single Phase													
Voltage (V)		115		110 or 220	230	220	115 or 230	115		115 or 230		115 or 230			
Amperage - Rated Current		5.9 (115V)		23.0 (110V) 11.5 (220V)	11.7	13	6.5 (115V) 3.4 (230V)	5.7 (115V)		9.9 (115V) 5.2 (230V)		5.8 (115V) 2.9(230V)		9.2 (115V) 4.6 (230V)	
Amperage - Starting Current		12.4 (115V)		141 (110V) 70 (220V)	70	70	18 (115V) 9 (230V)	11.1 (115V)		30.7 (115V) 17.6 (230V)		18 (115V) 7.9 (230V)		35 (115V) 16.7 (230V)	
Type		Continuous Duty, Air Filled, 3600 RPM, 60Hz													
Bearings		Double shielded, permanently lubricated, high-temp C3 with B-10 life of 60,000 hours													
Insulation Class		E		B	F	B	E	E				E			
Motor Protection (Built-In)		Miniature Protector		Circle Thermal Protector			Miniature Protector		Circle Thermal Protector		Miniature Protector		Circle Thermal Protector		
Plug Configuration (NEMA)		5-15P (115V)		No Plug			5-15P (115V) No Plug (230V)	5-15P (115V)		5-15P (115V) No Plug (220V)		5-15P (115V) No Plug (230V)			
Cable - # of Conductors x AWG		3C x 16AWG		3C x 12AWG	3C x 14AWG		3C x 16AWG		3C x 14AWG		3C x 16AWG		3C x 14AWG		
Standard Cable Length (ft.)		32	20	32			32	20		32		32			
Max. Cable Length (ft.)		110 (115V)		75 (110V) 300 (220V)	180	150	100 (115V) 380 (230V)	110 (115V)		100 (115V) 380 (230V)		45 (115V) 180 (230V)		48 (115V) 180 (230V)	
Recommended Generator Capacity (watts)		1230		8520	9060		2070	1280		3880		2080		4030	
Optional Float Switch	SLS-LSR32	SLS-LSC20	TS-304 (115V) TS-303 (220V)	TS-303		TS-301	TS-301	N/A	TS-302	N/A	TS-301	N/A	TS-302	N/A	
DIMENSION	Diameter (in.)	8 1/4	7 11/16	9 7/16	9 7/16	9 1/4	7 1/16	9 1/2	11 5/8	9 1/2	11 5/8	9 5/16	13	9 5/16	13
	Height (in.)	11 3/8	12 7/16	24 1/2	24 3/16	26 1/2	14 7/16	13 3/4	15 3/4	16	18	14 3/16	23 7/8	14 15/16	24 5/8
	Continuous Running Water Level (C.W.L.) (in.)	0.2	0.04	3 1/4	3 1/4	4 3/4	2 3/8	11 3/4	15 3/4 (Pump Starting Water Level)	13 3/4	18 (Pump Starting Water Level)	12 3/4	23 7/8 (Pump Starting Water Level)	13 5/8	24 5/8 (Pump Starting Water Level)
	Shipping Weight (lbs.)	27	29	80	81	90	27	35	35	46	46	20	21	25	26

SPECIFICATIONS - ENGINE PUMPS: TE • EPT

		TE2-25H	TE3-50HA	TE3-50V	TE3-80HA	TE3-80V	TE2-100HA	EPT3-50HA	EPT3-50V	EPT3-80HA	EPT3-100HA	EPT3-100V	
		1" Dewatering Pump	2" Dewatering Pump	2" Dewatering Pump	3" Dewatering Pump	3" Dewatering Pump	4" Dewatering Pump	2" Trash Pump	2" Trash Pump	3" Trash Pump	4" Trash Pump	4" Trash Pump	
FLUID	Max. Capacity (GPM)	34	137	137	264	264	476	185	185	357	569	476	
	Max. Capacity (GPH)	2040	8200	8220	15840		28560	11100		21420	34140	28560	
	Max. Head (ft)	115	105	92	105		92				95	92	
	Max. Solid Diameter (in.)	0.197	0.217					0.787		1.22			
PUMP	Impeller Type	Semi-Open											
	Impeller Material	Cast Iron						High Chrome Casting					
	Volute Casing Material	Cast Iron											
	Wear Plate Material	Integral Part of Volute						Stainless Steel					
	Pump Casing Material	Die Cast Aluminum						Cast Aluminum					
	Shaft Seal - Type / Material	Silicon Carbide Mechanical Seal											
	Seal Lubricant - Type	Water											
	Discharge Connection	1" NPSH Coupling	2" NPT Coupling	2" NPT Coupling	3" NPT Coupling	3" NPT Coupling	4" NPT Coupling	2" NPT Coupling	2" NPT Coupling	3" NPT Coupling	4" NPT Coupling	4" NPT Coupling	
	Suction Connection	1" NPSH Coupling	2" NPT Coupling	2" NPT Coupling	3" NPT Coupling	3" NPT Coupling	4" NPT Coupling	2" NPT Coupling	2" NPT Coupling	3" NPT Coupling	4" NPT Coupling	4" NPT Coupling	
	ENGINE	Brand	Honda		Vanguard	Honda	Vanguard	Honda		Vanguard	Honda		Vanguard
Model		GX-25	GX-120	160	GX-160	160	GX-240	GX-160	160	GX-240	GX-340	400	
Type		Air-Cooled 4-Cylinder w/ Oil Sensor		Air-Cooled Single Cylinder w/ Oil Sensor	Air-Cooled 4-Cylinder with Oil Sensor	Air-Cooled Single Cylinder w/ Oil Sensor	Air-Cooled 4-Cylinder w/ Oil Sensor		Air-Cooled Single Cylinder w/ Oil Sensor	Air-Cooled 4-Cylinder w/ Oil Sensor		Air-Cooled Single Cylinder w/ Oil Sensor	
Output (HP)		1.1	4	5	5.5	5	8	5.5	5	8	11	14	
RPM		2220	3600										
Fuel		Unleaded Gasoline											
Fuel Tank Capacity (US Gallon)		0.15	0.66	0.82	0.95	0.82	1.59	0.95	0.82	1.6	1.7	1.61	
Continuous Run Time Per Tank (hr.)		1.21	3	1.5	3.3	1.4	3.2	3.3	1.4	3.2	2.6	1.1	
Starting Method		Recoil Starter											
DIMENSION	Length (inches)	9	18 1/2	19 15/16	20 1/2	19 15/16	25	23 1/4	23 5/8	27 1/2	30 1/8	28 15/16	
	Width (inches)	14	14 5/8	15 11/16	16 1/2	15 11/16	18	18 1/4	17 1/8	20 1/8	20 1/8	20 1/4	
	Height (inches)	13	17 1/8	17 15/16	18 1/8	17 15/16	23 1/2	17 3/8	17 5/8	25 5/8	26	22 3/8	
	Shipping Weight (lbs.)	16	54	62	64	64	109	92	88	140	157	157	

SPECIFICATIONS - ENGINE PUMPS: THP • TD(E) • EPT5-150

		T P- 0 0	TD - 00	TD -300	TDE - 00	TDE -300	EPT5-150	EPT5-150 D	
		High Pressure Pump	2" Diaphragm Pump	3" Diaphragm Pump	2" lectric Diaphragm Pump	3" lectric Diaphragm Pump	6" Trash Pump	6" Trash Pump	
FLUID	Max. Capacity (GPM)	100	50	88	33	59	1000		
	Max. Capacity (GPH)	6000	3000	5280	1980	3540	60000		
	Max. Head (ft)	230	25					98	98
	Max. Solid Diameter (in.)	0.197	1 1/2	1 5/8	1 1/2	1 5/8	3		
PUMP	Impeller Type	Closed	Diaphragm					Semi-Open	
	Impeller (Diaphragm) Material	Aluminum	TP					Stainless Steel	
	Volute Casing Material	Cast Iron	N/A					Cast Aluminum	
	Wear Plate Material	Integral Part of Volute	N/A					Cast Iron	
	Pump Casing Material	Cast Aluminum	Sand Cast Aluminum					Aluminum	
	Shaft Seal - Type / Material	Silicon Carbide Mechanical Seal	N/A					Silicon Carbide / Buna	
	Seal Lubricant - Type	Water	N/A					Water	
	Discharge Connection	1x2" 1.5"x1 NPSH Coupling	2" NPT Coupling	3" NPT Coupling	2" NPT Coupling	3" NPT Coupling	6" NPT Coupling	6" NPT Coupling	
	Suction Connection	1.5" NPSH Coupling	2" NPT Coupling	3" NPT Coupling	2" NPT Coupling	3" NPT Coupling	6" NPT Coupling	6" NPT Coupling	
ENGINE	Brand	Honda			N/A		Honda	Call for Information	
	Model	GX-160	GX-120		N/A		GX-670		
	Type	Air-Cooled 4-Cylinder with Oil Sensor			N/A		Air-Cooled V-Twin w/ Oil Sensor	Li uid Cooled 4-Cycle 3 Cylinder w/ Tach Hour Meter / Oil Sensor	
	Output (HP)	5.5	4					24	23.4
	RPM	3600			1725		3600		
	Fuel	Unleaded Gasoline			lectric Motor (115V)		Unleaded Gasoline	Diesel	
	Fuel Tank Capacity (US Gallon)	0.95	0.5		Amperage		20		
					15.9 (115V) 8 (230V)				
	Continuous Run Time Per Tank (hr.)	3.3	2	3	N/A		12		
Starting Method	Recoil Starter			N/A		12V lectric Start (Battery not included)			
DIMENSION	Length (inches)	21	43	43	44	44	99	99	
	Width (inches)	16	20	26	20	26	48	48	
	Height (inches)	18	23	23	23	23	60	60	
	Shipping Weight (lbs.)	62	165	175	175	185	1125	1250	

TPG SERIES PORTABLE GENERATORS

TSURUMI TPG4 Series Generators are designed to withstand the severe conditions of construction jobsites or industrial applications, especially where extra durability and dependable, stable power are required. Ideal to supply the power to Tsurumi's single-phase submersible pumps and all your electrical power tools such as drills, saws, lighting and heaters.

TPG4 Series Generators Features *powered by Honda*

- High capacity fuel tank with fuel gauge for extended run time.
- Large, silent muffler with USDA qualified spark arrestor to greatly reduce noise.

Optional Accessories - See page 25 & 27

- Wheel Kit
- Lifting Bail



Powered by **Honda OHV engine** for efficient fuel consumption with oil alert system to shut off motor if oil falls below safe operating level.

Large air filter for **superior emission control**.

Automatic idle control reduces fuel consumption, noise, and engine wear.

Auto idle control switch on control panel.
(Not available on TPG4-3000HDX)

Rubber vibration pads isolate generator / engine set for **maximum protection and noise reduction**.



Carbon monoxide sensor shuts off the generator when dangerous levels of carbon monoxide are detected

SPECIFICATIONS - TPG4 Series Portable Generators



	TPG4-3000HDX	TPG4-3400HDX	TPG4-4500HDX
Max. / Rated Output (watts)	2600 / 2200	3400/2900	4500 / 3600
Max. Current (120V / 240V)	21.7	28.3	37.5/18.7
Rated Current (120V / 240V)	18.3	24.2	30/15
Voltage (V) (60Hz)	120	120	120 / 240
AC Outlet Replacement	1-NEMA 5-20R Duplex (20A, 120V, W/GFCI)	2-NEMA 5-20R Duplex (20A, 120V, W/GFCI)	2-NEMA 5-20R Duplex (20A, 120V) 1-NEMA L5-30R (30A, 120V, Twist Lock) 1-NEMA L14-30R (30A, 120/240V, Twist Lock)
Engine Model	GX-160	GX-200	GX-240
Maximum HP	5.5 (3600RPM)	6.0 (3600RPM)	8.0 (3600RPM)
Displacement	163 (10inch ³)	196 (12inch ³)	242 (15inch ³)
Fuel Tank Capacity (gallon)	4.2	4.2	6.6
Running Time (Rated load)	12.1	12.1	12.5
Starting System	Recoil	Recoil	Recoil
Noise Level (Rated Load)	64dB	64dB	68dB
Shipping Size (LxWxH) (inches)	25 x 20 x 22	25 x 20 x 22	29 x 25 x 24
Shipping Weight (lbs.)	112	124	169

	TPG4-6000HDX	TPG4-7000HDX TPG4-7000HDXE	TPG4-7500HDX TPG4-7500HDXE
Max. / Rated Output (watts)	5500 / 4800	6800 / 6000	7500/6500
Max. Current (120V / 240V)	45.8/40	56.7/50	62.5/31.3
Rated Current (120V / 240V)	22.9/20	28.3/25	54.2/27.1
Voltage (V) (60Hz)	120 / 240	120 / 240	120/240
AC Outlet Replacement		2-NEMA 5-20R Duplex (20A, 120V) 1-NEMA L5-30R (30A, 120V, Twist Lock) 1-NEMA L14-30R (30A, 120/240V, Twist Lock)	
Engine Model	GX-340	GX-390	GX-390
Maximum HP	11.0 (3600RPM)	13.0 (3600RPM)	13.0 (3600RPM)
Displacement	337 (21inch ³)	389 (24inch ³)	389 (24inches ³)
Fuel Tank Capacity (gallon)	6.6	6.6	6.6
Running Time (Rated load)	8.5	7.6	7.6
Starting System	Recoil	Recoil (HDX) Recoil & Electric (HDXE)	Recoil (HDX) Recoil & Electric (HDXE)
Noise Level (Rated load from 23ft)	72dB	78dB	78dB
Shipping Size (LxWxH) (inches)	29 x 25 x 24	29 x 25 x 24	29 x 25 x 24
Shipping Weight (lbs.)	187	196(HDX), 211(HDXE)	196(HDX), 211(HDXE)

See Page 25 for Generator Accessories

PUMP ACCESSORIES for Electric Submersible Pumps, Engine Pumps & Portable Generators

Automatic Float Switch Model: TS-301/302/303/304, SLS-LSR32, SLS-LSC20

See Page 30-31 for more details



TS-Series (TS-301/302/303/304)

Piggy-back float switches allow fast & easy installation of Tsurumi submersible pumps for automated operation.

TS301/TS302: NEMA 5-15P plug; 30'
TS303: NEMA 6-15P plug; 30'



SLS-LSC20 / SLS-LSR32

The surface level switch is used to automate a utility/floor sucking pump. Set the Surface Level Switch on the floor and plug the power cord from the pump into the piggyback plug on the switch. Plug the piggy-back plug into a standard 120 VAC wall outlet (the unit will also work on GFI outlets).



Hoses

See Page 26-27 for more details

Hose Kit



Hose Kit with NPT



Hose Kit with Quick Connect

Discharge Hose



NPT



Quick Connect

Other Hoses



Mill Hose



Suction Hose

Suction Hose



NPT



Quick Connect

Hose Accessories



Hose Nozzle



Quick Connect 'A'



Quick Connect 'F'

PUMP ACCESSORIES for Electric Submersible Pumps, Engine Pumps & Portable Generators

Sand Kit

Model: K15-SK / K22-SK

The Sand Kit can be added to the NK Series to suspend sand and prevent sand lock.




Residue Kit

Model: HS-RK

Available for the HS2.4S, the Residue Kit allows pumping of residual water down to 0.4 inches.



Wheel Kit / Lifting Bail

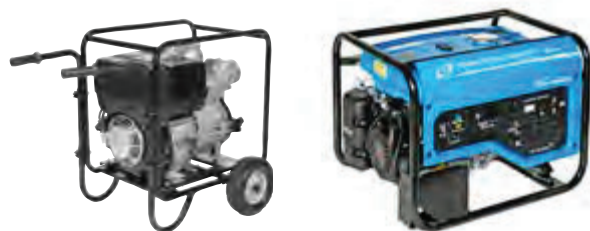

Wheel Kit PGWK-HX
for TPG4 Series Generator & Gas Engine Pumps



Lifting Bail
1560179500

Heavy-duty and easy to install our wheel kits, and lifting bails fit Tsurumi engine pumps & generators.

Wheel Kit (PGWK-HX)

for TPG4 generators & TE/EPT/THP engine pumps






Lifting Bail (1560179500)

for all TPG4 generators & TE/EPT/THP engine pumps*







*excluding TPG4-3000HDX

PUMP ACCESSORIES GUIDE for Electric Submersible Pumps

Electric Submersible Pumps

	Float Switch	Sand Kit	Residue Kit	2" Straight Discharge	3" Straight Discharge
MODEL					
LB-480	TS-301				
LB-480A					
LB-800	TS-302				
LB-800A					
LB-1500	TS-303 (220V Only)			032-351-11	
HS2.4S	TS-301		HS-RK	032-214-11	
HSZ2.4S			HS-RK	032-214-11	
HSE2.4S			HS-RK	032-214-11	
HS2.75S	TS-302				032-160-11
HSZ2.75S					032-160-11
HS3.75S	TS-302			032-158-16	032-160-11
HSZ3.75S				032-158-16	032-160-11
HS3.75SL	TS-302			032-158-16	032-160-11
HSZ3.75SL				032-158-16	032-160-11
HSD2.55S	TS-301			032-214-11	
NK2-15	TS-304 (115V) / TS-303 (220V)	K15-SK			
NK4-22	TS-303	K22-SK			
NK3-22L	TS-303				
LSR2.4S	SLS-LSR32				
LSC1.4S	SLS-LSC20			032-426-18	

Electric Submersible Pumps (continued)

	2" Discharge Hose NPT	2" Discharge Hose Quick Connect	2" Quick Disconnect 'A'	3" Discharge Hose NPT	3" Discharge Hose Quick Connect	3" Quick Disconnect 'A'
MODEL						
LB-480	X	X	X			
LB-480A	X	X	X			
LB-800	X	X	X			
LB-800A	X	X	X			
LB-1500*	X	X	X	X	X	X
HS2.4S	X	X	X			
HSZ2.4S	X	X	X			
HSE2.4S	X	X	X			
HS2.75S	X	X	X			
HSZ2.75S	X	X	X			
HS3.75S				X	X	X
HSZ3.75S				X	X	X
HS3.75SL				X	X	X
HSZ3.75SL				X	X	X
HSD2.55S	X	X	X			
NK2-15				X	X	X
NK4-22				X	X	X
NK3-22L				X	X	X
LSR2.4S	X	X	X			
LSC1.4S						

* Standard discharge size is 2". 3" is optional.

PUMP ACCESSORIES GUIDE for Engine Pumps & Portable Generators










Engine Driven Pumps: Discharge Size 1" and 1 1/2"

	Wheel Kit	Lifting Bail	1" Mill Hose	1" Suction Hose NPT	1.5" Mill Hose	1.5" Suction Hose NPT	1" Lexan Nozzle	1.5" Lexan Nozzle
MODEL	PGWK-HX Wheel kit ONLY 	1560179500 Lifting Bail ONLY 	XHM1N50 	XHS1N20 	XHM15N50 	XHS15N20 	XHLN1N20 	XHLN15N20 
TE2-25H			X	X				
THP-4070HA	X	X	X		X	X	X	X

Engine Driven Pumps: Discharge Size 2", 3", and 4"

	Strainer	Wheel Kit	Lifting Bail	2" Hose Kit NPT	2" Hose Kit Quick	2" Dis. Hose NPT 50'	2" Dis. Hose Quick 50'	2" Suc. Hose NPT 20'	2" Suc. Hose Quick 20'	2" Quick Disconnect 'A'	3" Hose Kit NPT	3" Hose kit Quick
MODEL		PGWK-HX Wheel kit ONLY 	1560179500 Lifting Bail ONLY 	XHK2RNPT 	XHK2RQC 	XXHS2D 	XHD2QC50 	XXHS2S 	XHS2QC20 	G200-A-AL 	XHK3RNPT 	XHK3RQC 
TE3-50HA / -50V	Z047		X	X	X	X	X	X	X	X		
TE3-80HA / -80V	Z048	X	X								X	X
TE2-100HA	Z055	X	X									
EPT3-50HA / -50V	Z049	X	X	X	X	X	X	X	X	X	X	X
EPT3-80HA	Z050	X	X									
EPT3-100HA / -100V	Z051	X	X									
TD(E)6-200	Included			X	X	X	X	X	X	X		
TD(E)6-300	Included										X	X

Engine Driven Pumps: Discharge Size 2", 3", and 4" (Continued)


	3" Dis. Hose NPT 50'	3" Dis. Hose Quick 50'	3" Suc. Hose NPT 20'	3" Suc. Hose Quick 20'	3" Quick Disconnect 'A'	4" Hose Kit NPT	4" Hose kit Quick	4" Dis. Hose NPT 50'	4" Dis. Hose Quick 50'	4" Suc. Hose NPT 20'	4" Suc. Hose Quick 20'	4" Quick Disconnect 'A'
MODEL	XXHS3D 	XHD3QC50 	XXHS3S 	XHS3QC20 	G300-A-AL 	XHK4RNPT 	XHK4RQC 	XXHS4D 	XHD4QC50 	XXHS4S 	XHS4QC20 	G400-A-AL 
TE3-50HA / -50V												
TE3-80HA / -80V	X	X	X	X	X							
TE2-100HA						X	X	X	X	X	X	X
EPT3-50HA / -50V												
EPT3-80HA	X	X	X	X	X							
EPT3-100HA / -100V						X	X	X	X	X	X	X
TD(E)6-200												
TD(E)6-300	X	X	X	X	X							

Portable Generators


	Wheel Kit	Lifting Bail
MODEL	PGWK-HX  Wheel kit ONLY	15601795000  Lifting Bail ONLY
TPG4-3000HDX	X	
TPG4-3400HDX	X	
TPG4-4500HDX	X	X
TPG4-6000HDX	X	X
TPG4-7000HDX	X	X
TPG4-7000HDXE	X	X
TPG4-7500HDX	X	X
TPG4-7500HDXE	X	X

Anti-Wicking Cable Entrance: Maximum protection against water incursion through the cable entry.

- Molded Cable Boot or Cable Protection Tube - extends cable bending radius, prevents abrading, and reduces fatigue.
- Cable Gland - provides 360 degree compression of cable boot, protection tube or cable bush for a water tight fit.
- Anti-Wicking Block - window cuts on conductor insulation expose strands to molded rubber or epoxy to prove water wicking through the strands and entering the motor providing protection even if the cable insulation is cut.



Circle Thermal Protector (CTP): For pumps with 1-10HP: 3-Pole protector connects to each winding of the motor and reacts to excessive heat and amperage. Automatic reset at safe temperature to restart the motor. No motor protection circuit required in starter or control panel.




V-Ring: V-Ring is mounted at the top of the impeller and is brought in close contact to the bottom of the mechanical seal by the internal pressure of the pump casing. This V-Ring acts as a dust seal to prevent fine abrasive particles in the pumping fluid from reaching the mechanical seal.




High-Performance Motor: Dry type, squirrel-cage, induction motor, housed in a watertight casing, conforms to either insulation class B or E, or F. In both of these classes, all standard pumps can be used in ambient temperature up to 104°F (40°C).

Dual Inside, Silicon Carbide Mechanical Seals:

Isolation of mechanical seals in an oil chamber provides a clean, non-corrosive and abrasion free lubricating environment to prevent spring failure due to corrosion or abrasion and bottom seal failure due to loss of cooling during dry-run conditions.

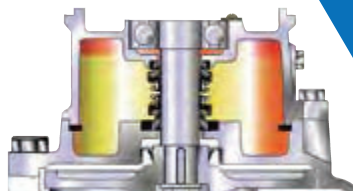

Oil Lifter: Tsurumi's Oil Lifter encloses the mechanical seal and uses the centrifugal force generated by the rotating shaft and seal to pump oil to the upper seal faces. Upper and lower seal faces are positively lubricated even when extremely low oil levels exist, as experienced after long periods of extended operation.

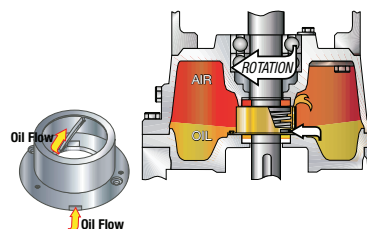

TSURUMI (AMERICA), INC.

Headquarters: 1625 Fullerton Ct, Glendale Heights, IL 60139
 Utah Office: 3822 West 1987 South, Salt Lake City, UT 84104
 Tel: 1-888-878-7864 (Toll-Free) • 1-630-793-0127
 Fax: 1-630-793-0146 • www.tsurumipump.com



Your Dealer



MILLER

SALES & ENGINEERING INC.

1641 W. Commerce Ct. Tucson, AZ 85746
 T (520) 888-4101
mseinc.net
info@mseinc.net



Find us @[tsurumiamerica](https://www.facebook.com/tsurumiamerica)